



MECCANICA **B**ENASSI® S.R.L.

PROFESSIONAL GROUNDSCARE EQUIPMENT

ROBUST, POWERFUL AND RELIABLE

2026
CATALOGUE



FOX
Tractors



+39 0532 848193



info@benassi.it



www.benassi.it



DESIGNED AND MANUFACTURED IN ITALY



FOX TRACTORS

EXTREME PERFORMANCE,
RELIABILITY AND CUTTING POWER

Meccanica Benassi's tractors are designed for landscaping professionals, offering a perfect balance between advanced technology and versatility.

Each model is powered by hydrostatic transmissions, offering a smooth and precise drive, and can be ordered in a two-wheel drive (2WD) or 4-wheel drive (4WD) option, in order to safely tackle any kind of terrain with confidence.

These tractors are the ideal choice for those seeking high performance and reliability in green care, establishing themselves as an indispensable tool for daily work in professional gardens, parks, and green spaces, raw and difficult terrains, road embankments, undergrowth, sloped ground and terraced landscapes.

Rear Differential Lock and tractor tires as standard ensure optimal traction and improve stability, providing seamless control in challenging working conditions.

Cutting Range. Available in three sizes: 85, 95 and 110 cm. To perfectly match any operational demand, maximizing efficiency.



PROFESSIONAL QUALITY

Fox tractors are built to last, ensuring consistent cutting on demanding surfaces.

Overall robustness and quality components guarantee professional cutting with minimum effort.



COMFORT SEAT

Six adjustable positions are available on the seat, with enveloping sides for a smooth ride on rugged terrain.

ERGONOMIC STEERING WHEEL

Ergonomic steering wheel with handle.

CONTROL PANEL

Intuitive control dashboard.



TWIN PEDAL SYSTEM

For easy and quick control of the tractor in forward and reverse.



FRONT BUMPER

A large protection bumper with anchor points, to fasten the tractor during transit on other vehicles.



FRONT AXLE

Pivoting front axle.

FRONT WHEELS

Wide tires with tractor profile.

FOX 110 4WD VANGUARD

ENGINE SPECIFICATIONS

This tractor is powered with the latest version of the gasoline engine B&S Vanguard V-Twin WITH 26 HP – 810cc with electric starter.

The efficient air cooling system let FOX tractors perform at an optimal temperature for extended periods of time even in demanding weather like the hottest days.

Lastly, this engine offers high-performance two-stage air filtration.



REAR AXLE

Rear Hydrostatic Axle with bearing supports.



CUTTING HEIGHT ADJUSTMENT


4 fixed and 6 floating positions

LARGE FUEL TANK

13 Litres gasoline tank for outstanding fuel economy.


REAR WHEELS

Wide tires with tractor profile.

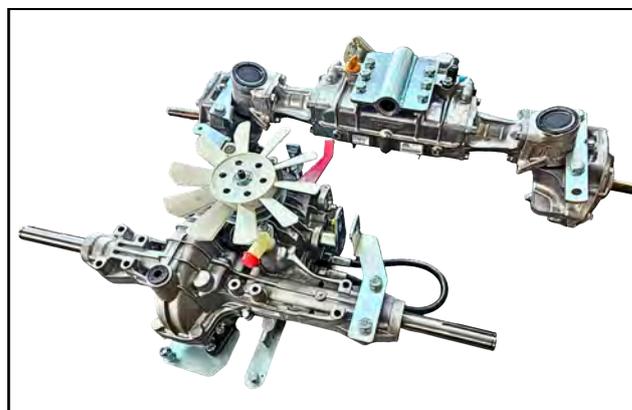

4WD HYDROSTATIC TRANSMISSIONS

The Tuff Torq™ 4WD system automatically adjusts traction on all wheels while the manual differential lock ensures optimal grip on challenging terrain.

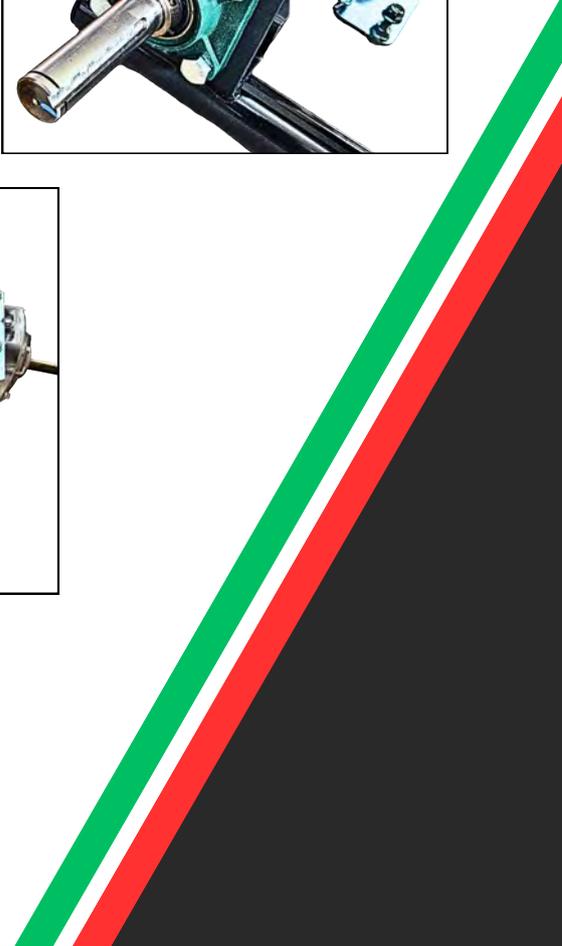



FOX RANGE

FOX 110 4WD
B&S VANGUARD



FOX 110 4WD
B&S 8290



FOX 110 2WD
LONCIN LC2P77F



FOX 95 4WD
B&S 8290



FOX 95 4WD
LONCIN LC2P77F



FOX 95 2WD
LONCIN LC2P77F



FOX 85 MINI
LONCIN LC1P92F



DESIGNED AND MANUFACTURED IN ITALY

FEATURES




OFF-THE-SIDE CUTTING

The overhanging cutting deck of the FOX 110 enables mowing near edges and walls where space is tight for the operator.



EXTREME CONDITIONS

Excellent grip assured by tractor-profile rubber tires in order to work on difficult terrain.

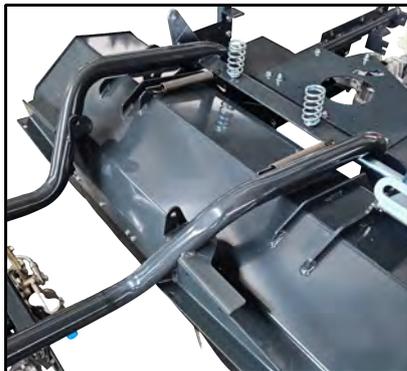

ROBUST FRAME

Automotive-style chassis, built with Ø42,4 mm round tubes, for optimal comfort and robustness.



	Fox 110 4WD	Fox 110 4WD	Fox 110 2WD	Fox 95 4WD	Fox 95 4WD	Fox 95 2WD	Fox 85 Mini
Engine	B&S	B&S	Loncin	B&S	Loncin	Loncin	Loncin
Model	Vanguard	8290	LC2P77F	8290	LC2P77F	LC2P77F	LC1P92F
Displacement	811cc	724cc	708cc	724cc	708cc	708cc	452cc
Starter	Electric						
Air Filter	Cyclone	Standard	Cyclone	Standard	Cyclone	Cyclone	Standard
Transmission	Hydrostatic						
Max Speed	9 km/h (F)	9.5 km/h (F)					
Diff. Lock	Standard						
Traction	4WD	4WD	2WD	4WD	4WD	2WD	2WD
Cutting	Flail Mower						
N° of Blades	60	60	60	52	52	52	48
Cutting Width	110 cm	110 cm	110 cm	95cm	95cm	95cm	85 cm
Cutting Height	30-92mm						
Front Wheels	16*6,50/8 Tractor	4.00-8 Tractor					
Rear Wheels	20x10/8 Tractor	17x8.00-8 Tractor					
Fuel Tank Capacity (L)	13,2 L	10,4 L					
Dimensions (Lu-La-AI)	2020x1271x1212	2020x1271x1212	2020x1271x1212	2020x1120x1212	2020x1120x1212	2020x1120x1212	1992x1026x1150
Weight (kg)	393	390	375	380	384	347,5	311
Cutting Capacity (mq/h)	8800	8800	8800	7600	7600	7600	6800



MECCANICA BENASSI S.R.L.



DESIGNED AND MANUFACTURED IN ITALY



MECCANICA BENASSI S.R.L

Via Statale n. 325, Dosso, 44047
Terre del Reno (Ferrara) - Italy

Tel. (+39) 0532.848193

Fax (+39) 051 08.22.449

Web: www.benassi.it

Mail: info@benassi.it

Pec: meccanicabenassi@pec.benassi.it

P.IVA e CF: IT00341260388 - REA: FE97187
Capitale Sociale € 619.200 Interamente Versato